

KI-N1525


1.5U Rackmount chassis ultra compact size support Mini-itx M/B



Introduction

The industrial level 1.5U rackmount chassis. The KI-N1525 is the most compact 1.5U chassis support Mini-ITX system

It support 1x 3.5" and 2x 2.5" hard drive bays, and standard I/O plate

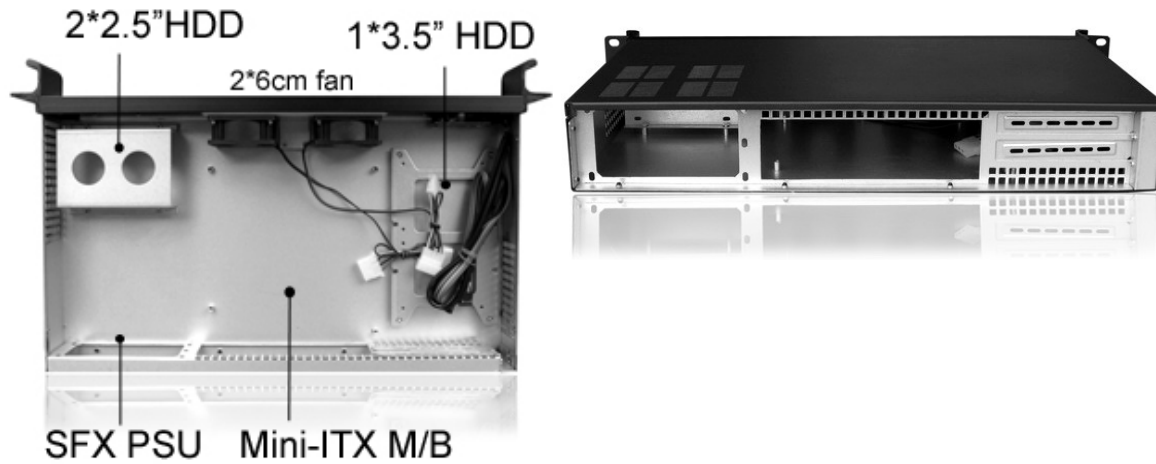


Features and Benefits

- Compact size to save space, Depth=250mm
- With stylish industrial aluminum front door (with hidden vent holes)
- Support standard I/O backplane


Specification

| | |
|-------------------------------------|---|
| Dimension (W*H*D) | 19" x 1.5U x 9.84"/ 482 x 68 x 250 (mm) |
| Material Construction | Heavy-duty & Rugged steel SGCC 1.0mm Industrial Aluminum front panel and handles |
| Expansion | 1slot 32bit riser card PCI100-32 left or right hand (Option) 1slot 32bit riser card w/robbion cable PCI100-32(Option) 2slot 32bit riser card w/robbion cable PCI200-32-RC(Option) |
| M/B Size | 17cm x 17cm (Atom Mini-ITX) |
| Control & Indicator | 1*Power switch +1* Reset switch 1 x LED(power) +1 x LED(HDD) 2*2.0 USB |
| Cooling Fans | 2x 6cm silent Fan |
| DriveBay | 1x 3.5" and 2x 2.5"(Internal) |
| Power Supply | SFX 200w~400w PSU(option) |
| Sliding rail | 20" (option) |
| Color | Black / Red / Bule / Green / Silver |
| Operation Temperature | Up to 50C (122°F) |
| Operation Humidity (Non-condensing) | Up to 90% |
| Packing Measurement CBF / CBM | 1.8 / 0.05 |
| Packing N.W / G.W | 3.5KGS / 4.5KGS |

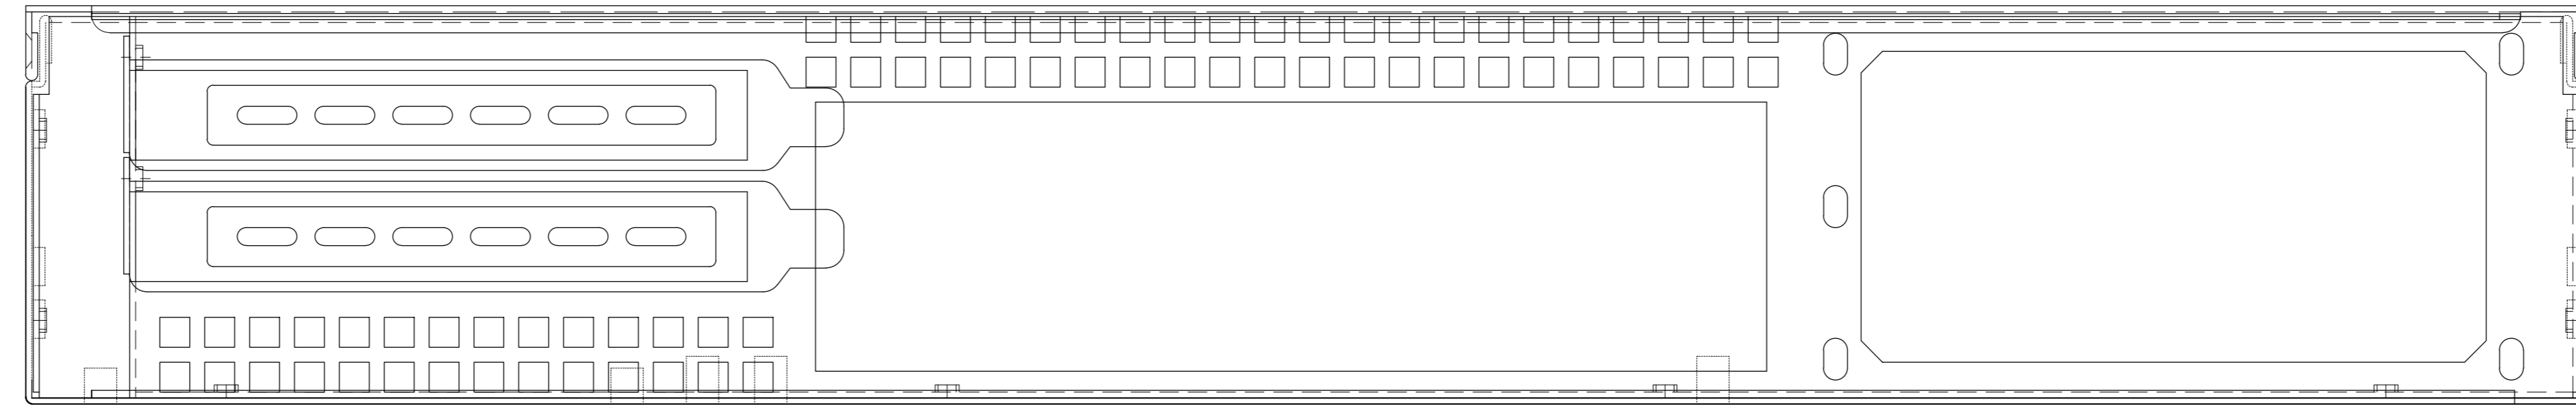

A-A

428

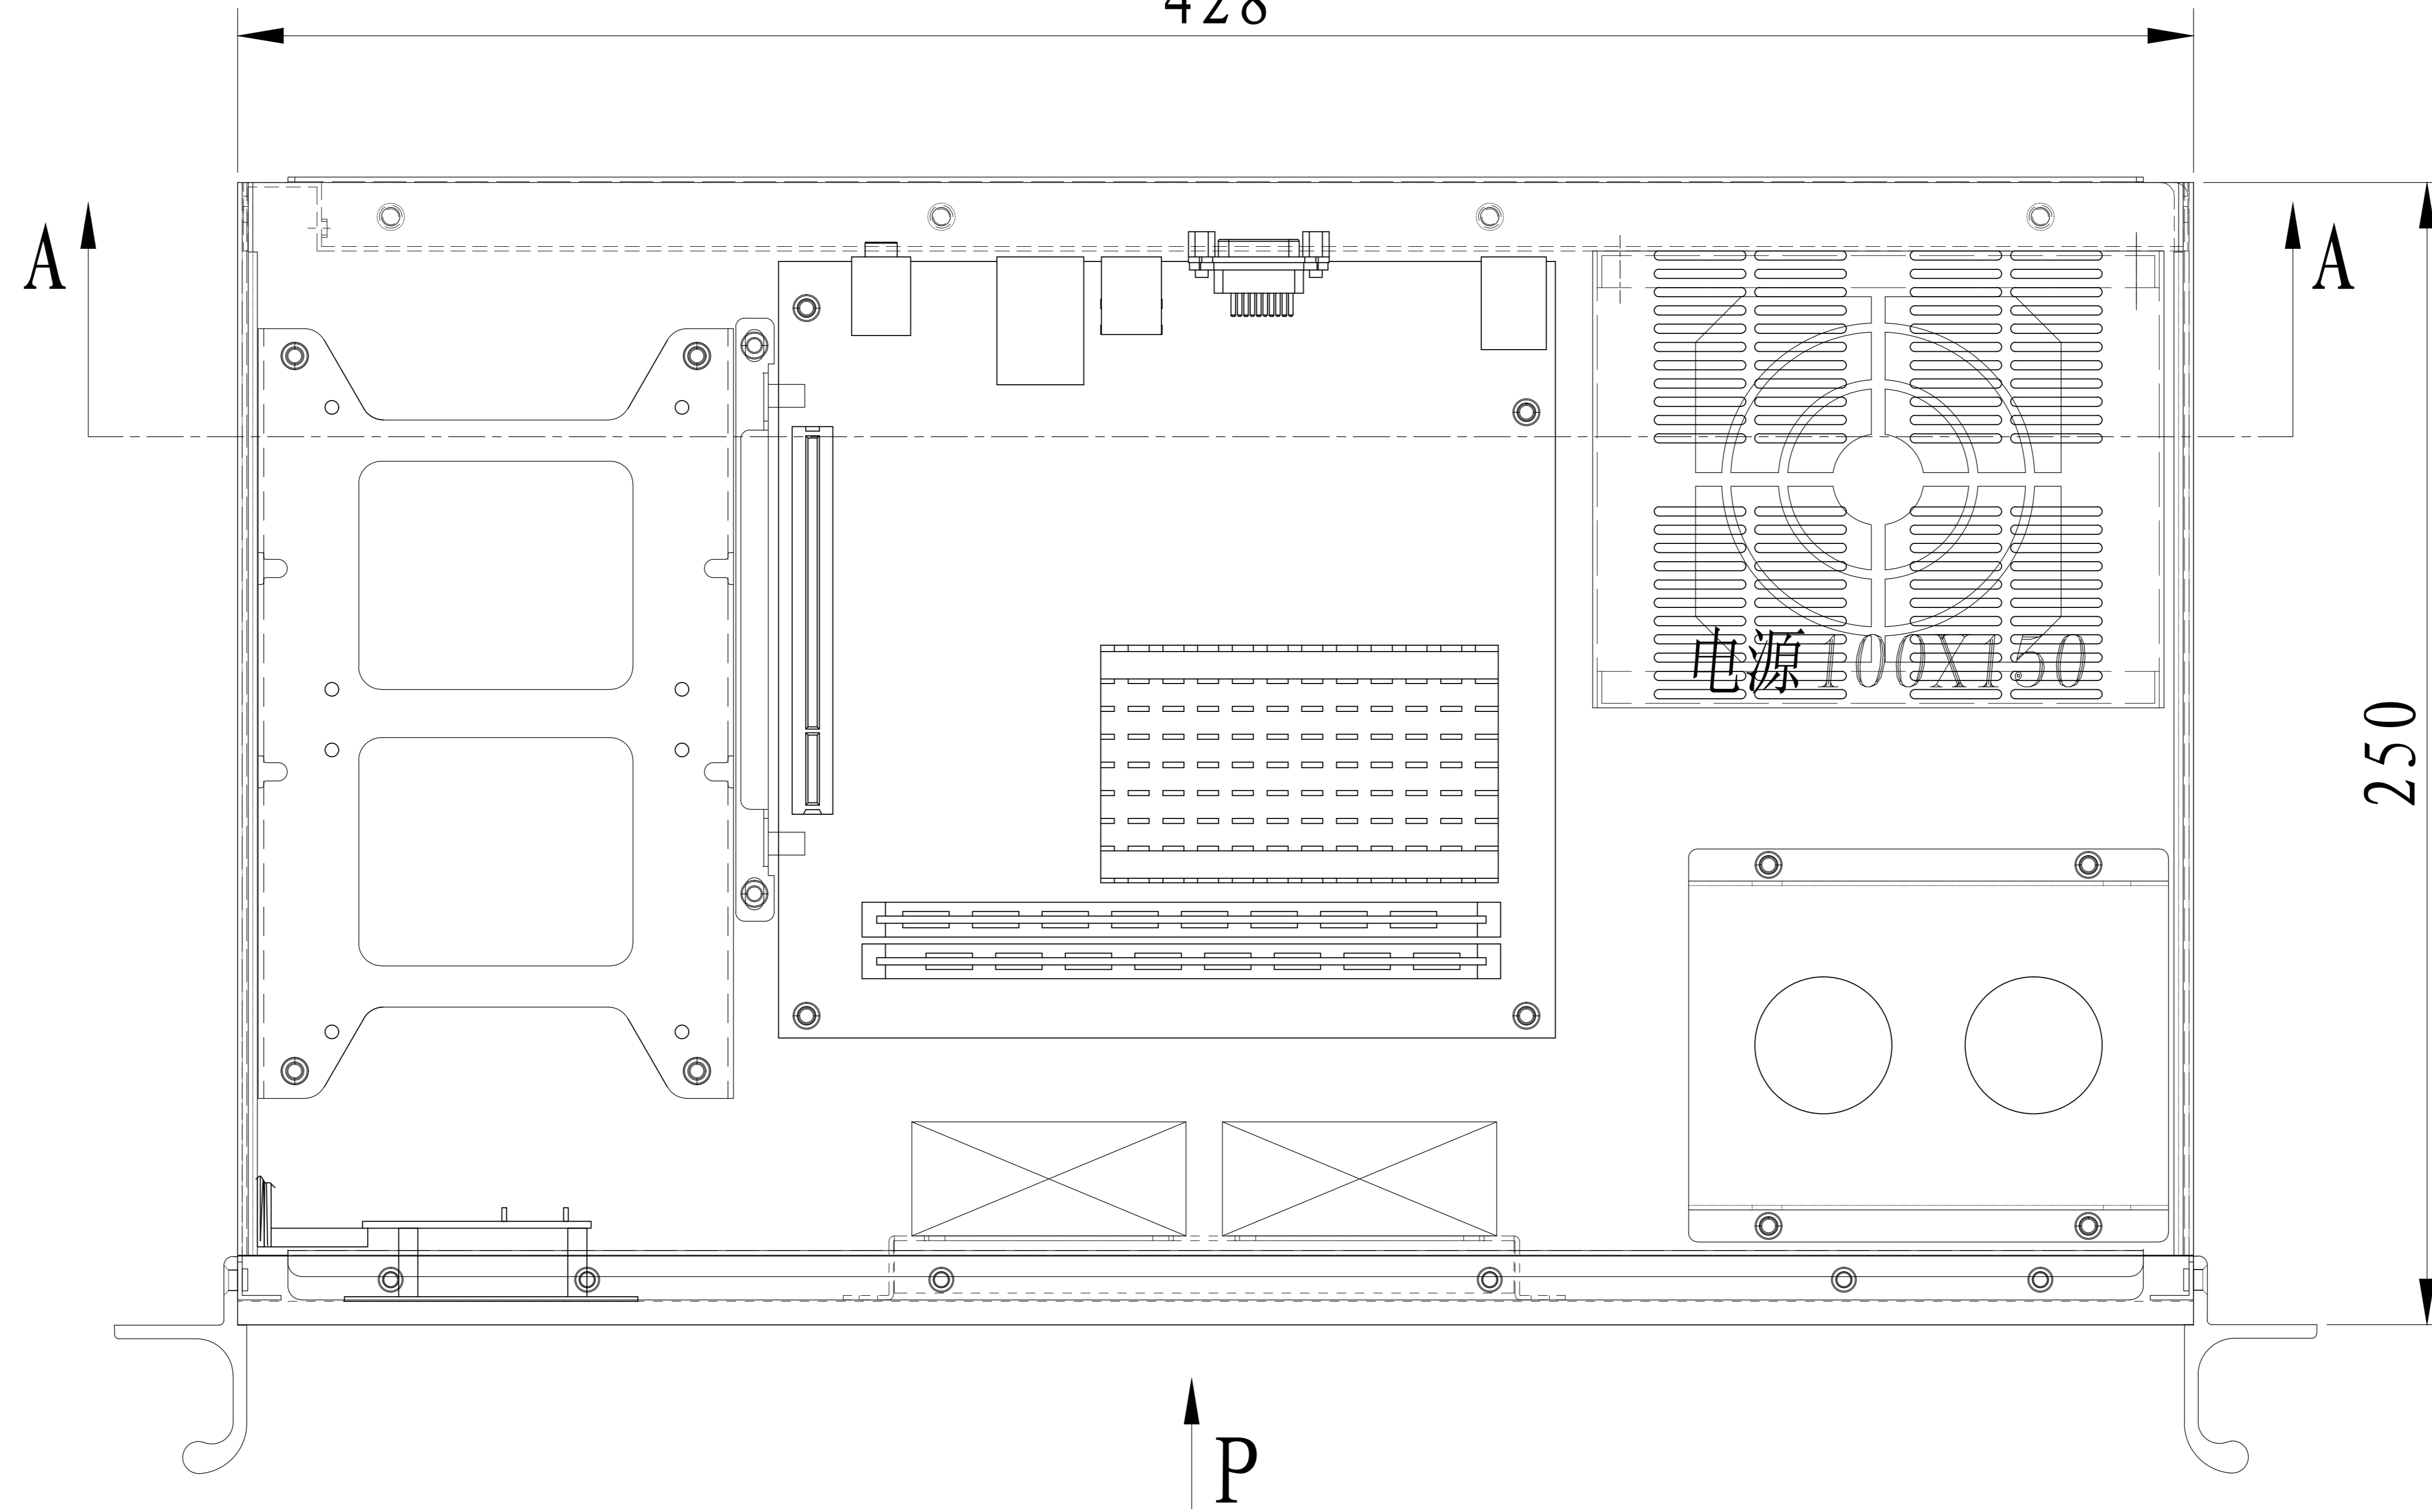

A


A

250

P

482

465

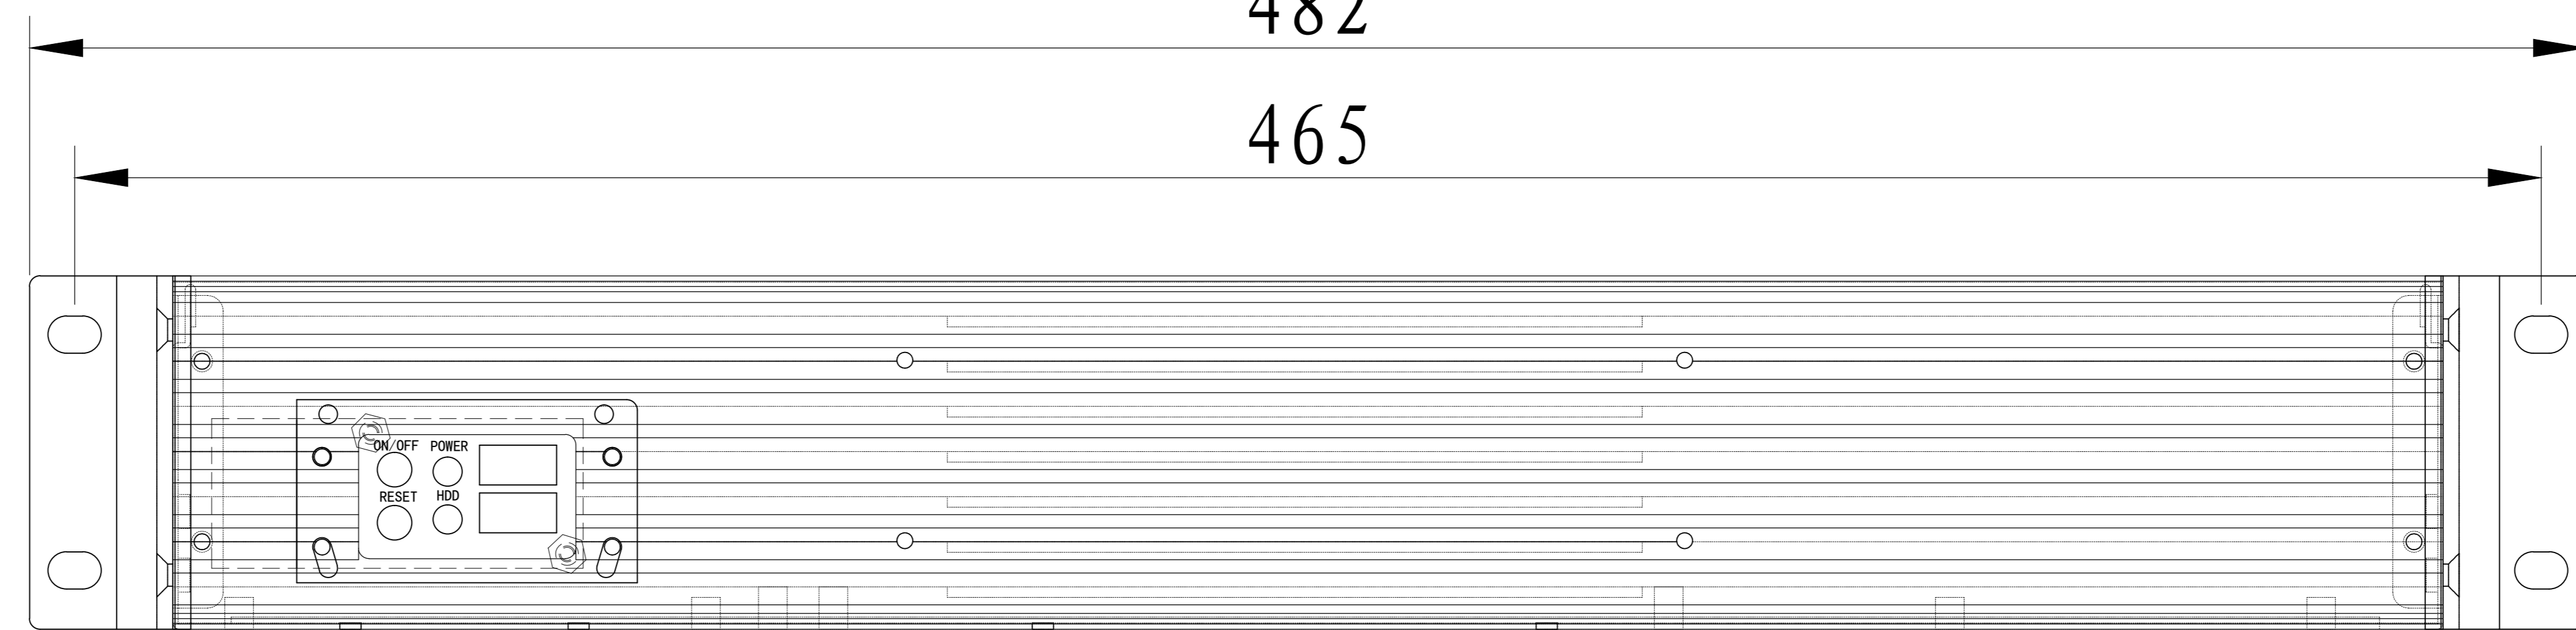

66.6

P向

