

## KI-M236

### 2U Ultra compact Mini-ITX dual system chassis KI-M236





#### Introduction

CasePro 2U industrial rackmount chassis KI-M236.Total capacity for Dual Atom Mini-ITX system

The KI-M236 has 4x 3.5" hard drive bays

#### Features and Benefits

- ▶ Dual Mini-ITX system
- ▶ 4\*3.5"(Internal)
- ▶ Front access USB2.0\*2
- ▶ High efficiency 1U flex 200w (250w max)powersupply
- ▶ Power,LAN,Fan, HDD LED

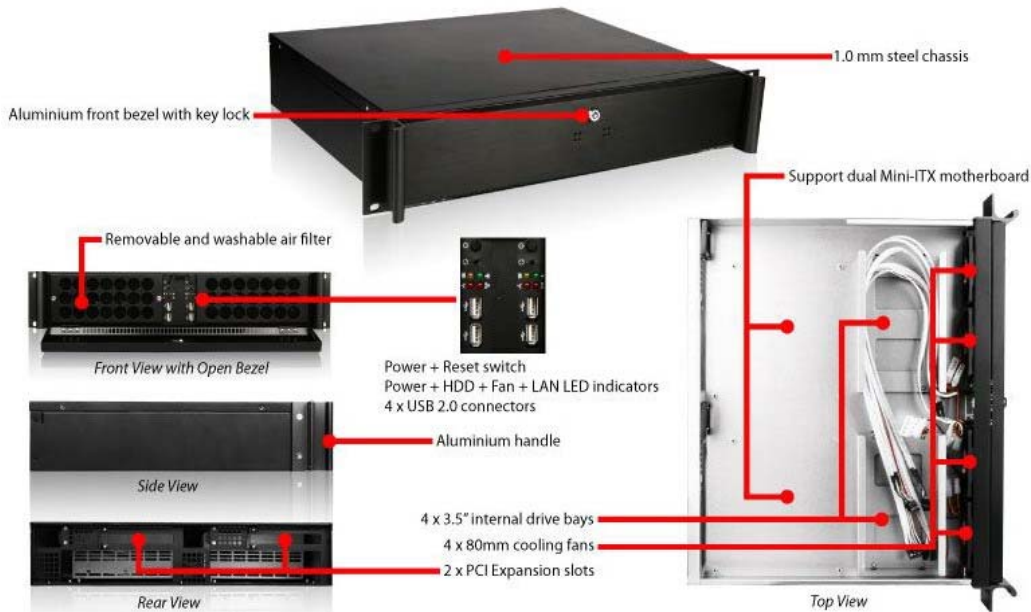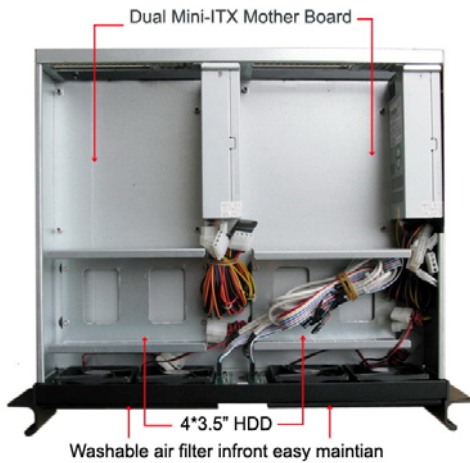

## Specification

Dimension (W*H*D)	19"*3.5"*14.17"/ 482*89*360 (mm)
Material Construction	Heavy-duty and anti-rusty steel,thickness:1.0mm
Expansion	1slot 32bit riser card w/robbion cable PCI100-32-RC(Option) 1slot 32bit riser card w/robbion cable PCIE100-16-RC(Option)
M/B Size	Dual Mini-ITX 17"*17" 2*Power switch +2* Reset switch
Control & Indicator	2 x LED(power)+2 x LED(HDD)+2x LED(Lan)+2xLED(Fan) 4*2.0 USB
Cooling Fans	4x 80mm silent Fan / washable air filter easy maintian
Front door	Lockable aluminum front door with anode(optional)
DriveBay	4 x 3.5" (internal)
Power Supply	Dual High-efficiency 1U Flex P/S 200w (max 250w) (option)
Sliding rail	18" ball bearing sliding rail (option)
Color	Black / Red / Bule / Green / Silver
Operation Temperature	Up to 50C (122°F)
Operation Humidity (Non-condensing)	Up to 90%
Packing Measurement CBF / CBM	2.0 / 0.06
Packing N.W / G.W	6.5KGS /7.5KGS